

PLIO-V-MARKERS® oval markers in semi-cut pull-off form



PLIO-V-MARKERS®






PLIO-V-MARKERS

Material:	flexible PVC
Temperature range:	-20 to +90°C
Hardness Shore A:	80 ± 5
Tensile strength at break:	18 MPa
Ultimate elongation:	250 %
Dielectric strength:	> 20 kV/mm
Flame resistance:	V0 UL94

Application: To identify wires and cables of o.d. 0,6 to 8 mm.



- Can be easily applied due to their **oval shape**.
- **No tool** is required.
- The **chevron edge** allows **exact lining up of the legends**.
- Marking of the cable can be done **before and during the connection**.
- Available **in flat reels** which can be placed side by side to allow easy storage and ensure protection of the markers.
- **Dispensers** are available to group reels together, ideal for **on site use**

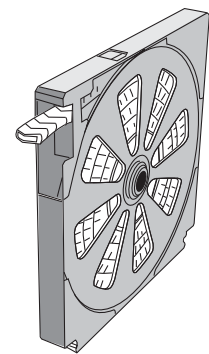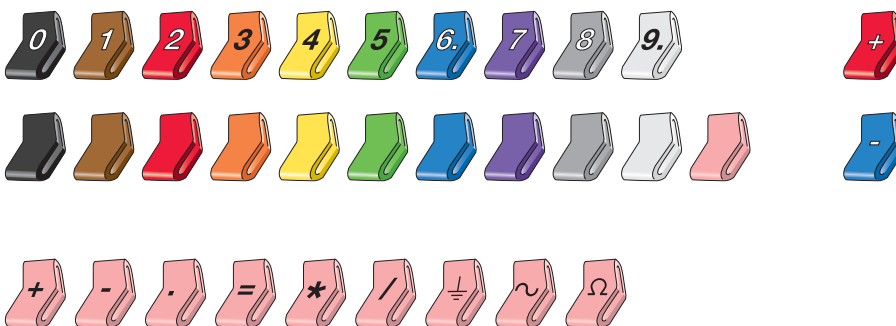

Other symbols upon request.

B7/3-01



only for V-65

B7/4-05



PLIO-V-MARKERS® oval markers in semi-cut pull-off form



PLIO-V-MARKERS®



PLIO-V-MARKERS oval markers

Example for order:

code group	detail article	code colour	code marker
0360	0101015	F	

V-09		0360010101015F
V-16		0360010301015TER
V-37		0360020700053
V-65		0360031110004



detail article

type	pink	article number international code	unprinted markers	for cablesØ mm	sections mm²	sections rings
V-09	0360 0101 015 ***	0360 0201 *** **	0360 0301 ***	0,6 - 0,8	0,4	1000
V-11	0360 0102 015 ***	0360 0202 *** **	0360 0302 ***	0,8 - 1,1	0,4	1000
V-16	0360 0103 015 ***	0360 0203 *** **	0360 0303 ***	1,1 - 1,5	0,4	1000
V-22	0360 0104 015 ***	0360 0204 *** **	0360 0304 ***	1,3 - 2,0	0,5	1000
V-27	0360 0105 015 ***	0360 0205 *** **	0360 0305 ***	1,6 - 2,5	0,75 - 1	500
V-30	0360 0112 015 ***	0360 0206 *** **	0360 0306 ***	2,1 - 2,8	0,75 - 1	1000
V-37	0360 0106 015 ***	0360 0207 *** **	0360 0307 ***	2,3 - 3,4	1 - 1,5 - 2,5	500
V-40	0360 0107 015 ***	0360 0208 *** **	0360 0308 ***	2,8 - 4,2	1,5 - 2,5 - 4	500
V-50	0360 0108 015 ***	0360 0209 *** **	0360 0309 ***	3,4 - 4,9	4 - 6	500
V-60	0360 0109 015 ***	0360 0210 *** **	0360 0310 ***	3,9 - 5,7	6 - 10	500
V-65	0360 0110 015 ***	0360 0211 *** **	0360 0311 ***	4,2 - 6,6	10 - 16	500
V-80*	0360 0111 015 ***	0360 0212 *** **	0360 0312 ***	4,6 - 7,9	16	100

* available in bags of 5 bars with 20 markers

code colours

010	006	007	005	004	003	002	008	013	001	015
black	brown	red	orange	yellow	green	blue	violet	grey	white	pink

code markers

A	0360 0*** 015 A	0	0360 0*** 015 0	0	0360 0*** 010 0		0360 0*** 010
B	0360 0*** 015 B	1	0360 0*** 015 1	1	0360 0*** 006 1		0360 0*** 006
C	0360 0*** 015 C	2	0360 0*** 015 2	2	0360 0*** 007 2		0360 0*** 007
D	0360 0*** 015 D	3	0360 0*** 015 3	3	0360 0*** 005 3		0360 0*** 005
E	0360 0*** 015 E	4	0360 0*** 015 4	4	0360 0*** 004 4		0360 0*** 004
F	0360 0*** 015 F	5	0360 0*** 015 5	5	0360 0*** 003 5		0360 0*** 003
G	0360 0*** 015 G	6	0360 0*** 015 6	6	0360 0*** 002 6		0360 0*** 002
H	0360 0*** 015 H	7	0360 0*** 015 7	7	0360 0*** 008 7		0360 0*** 008
I	0360 0*** 015 I	8	0360 0*** 015 8	8	0360 0*** 013 8		0360 0*** 013
J	0360 0*** 015 J	9	0360 0*** 015 9	9	0360 0*** 001 9		0360 0*** 001
K	0360 0*** 015 K						0360 0*** 015
L	0360 0*** 015 L						
M	0360 0*** 015 M						
N	0360 0*** 015 N	+	0360 0*** 015 +	+	0360 0*** 007+		
O	0360 0*** 015 O	-	0360 0*** 015 -	-	0360 0*** 002-		
P	0360 0*** 015 P	.	0360 0*** 015 .				
Q	0360 0*** 015 Q	=	0360 0*** 015 =				
R	0360 0*** 015 R	*	0360 0*** 015 *				
S	0360 0*** 015 S	/	0360 0*** 015 /				
T	0360 0*** 015 T	↓	0360 0*** 015 TER				
U	0360 0*** 015 U	~	0360 0*** 015 ALT				
V	0360 0*** 015 V	Ω	0360 0*** 015 OHM				
W	0360 0*** 015 W						
X	0360 0*** 015 X						
Y	0360 0*** 015 Y						
Z	0360 0*** 015 Z						